


# CLOU XTRA



AUSTROFLAMM

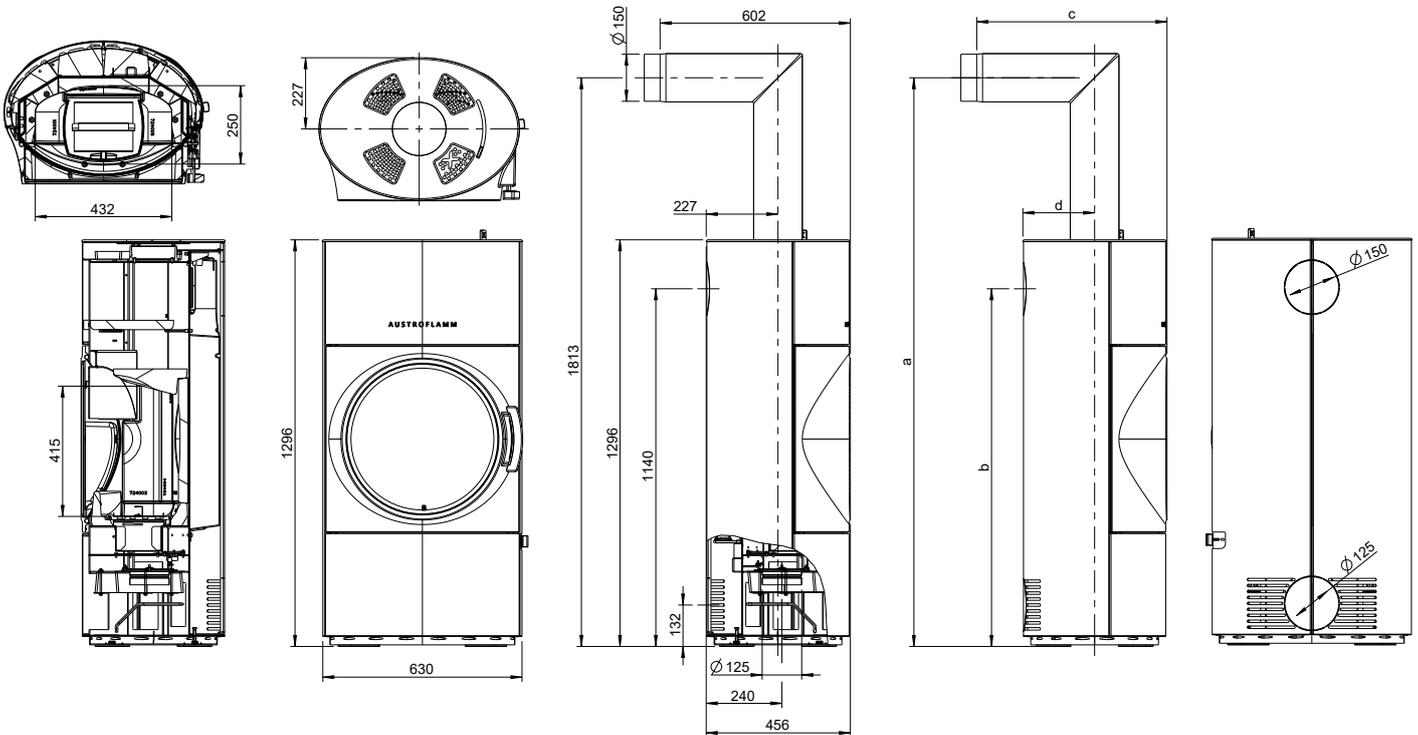

Dimensions and weight	
Height [mm]	1296
Width [mm]	630
Depth [mm]	456
Combustion chamber width [mm]	432
Combustion chamber height [mm]	415
Combustion chamber depth [mm]	250
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	1813
Dimensions, b (with Austroflamm elbow piece) [mm]	1140
Dimensions, c (with Austroflamm elbow piece) [mm]	602
Dimensions, d (with Austroflamm elbow piece) [mm]	227
Flue pipe outlet, diameter [mm]	150
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	290
Weight Xtra [kg]	108
Weight, HMS [kg]	NPD
Total weight inc. steel case (STM) [kg]	290
Total weight inc. ceramic case (KGM) [kg]	NPD
Total weight inc. soapstone case (SPM) [kg]	NPD
Minimum distance to combustible materials - distance to rear dR [mm]	200
Minimum distance to combustible materials - left side dS_1 [mm]	420
Minimum distance to combustible materials - right side dS_2 [mm]	420
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1100
Minimum distance to combustible materials - floor in front dF [mm]	480
Minimum distance to combustible materials - bottom dB [mm]	0
Minimum distance to combustible materials - left side radiation area dL_1 [mm]	0
Minimum distance to combustible materials - right side radiation area dL_2 [mm]	0
Minimum distance to combustible materials - distance to ceiling dC [mm]	750
Minimum distance from non-flammable materials [mm]	50
Output	
Nominal heat efficiency [kW]	8.0
Minimum heat output [kW]	NPD
Maximum heat output [kW]	8.0
Minimum room heating capacity [m³]	120
Maximum room heating capacity [m³]	160
Energy efficiency class	A
Energy efficiency index (EEI)	106
Direct heat output [kW]	8.0
Indirect heat output [kW]	NPD
Efficiency at nominal heat output [%]	80.0
Efficiency at part load heat output [%]	NPD
Equipment	
Xtra heat storage technology	standard
Heat Memory System	-
External air connection / operation independent of ambient air	Yes
Ash removal	Ash box

- not available

## Data for the chimney sweep

Flue gas mass flow at nominal heat output [g/s]	6.6
Flue gas temperature [°C]	357
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10