


CLOU COMPACT COOK



AUSTROFLAMM

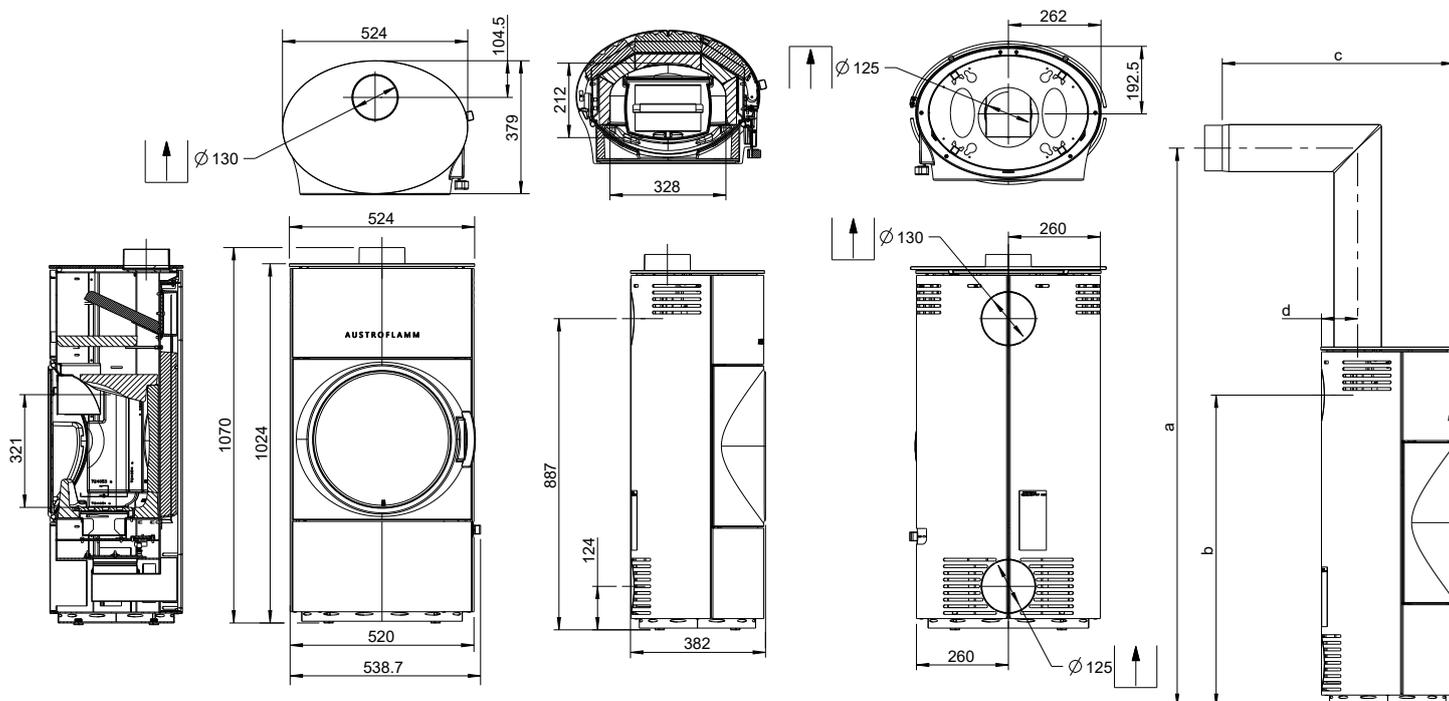

Dimensions and weight	
Height [mm]	1024
Width [mm]	520
Depth [mm]	375
Combustion chamber width [mm]	328
Combustion chamber height [mm]	321
Combustion chamber depth [mm]	212
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1601
Dimensions, b (with Austroflamm elbow piece) [mm]	887
Dimensions, c (with Austroflamm elbow piece) [mm]	656
Dimensions, d (with Austroflamm elbow piece) [mm]	105
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	112
Weight Xtra [kg]	-
Weight, HMS [kg]	37
Total weight inc. steel case (STM) [kg]	122
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
Minimum distance to combustible materials - distance to rear dR [mm]	150
Minimum distance to combustible materials - left side dS_1 [mm]	150
Minimum distance to combustible materials - right side dS_2 [mm]	150
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1050
Minimum distance to combustible materials - floor in front dF [mm]	750
Minimum distance to combustible materials - bottom dB [mm]	0
Minimum distance to combustible materials - left side radiation area dL_1 [mm]	400
Minimum distance to combustible materials - right side radiation area dL_2 [mm]	400
Minimum distance to combustible materials - distance to ceiling dC [mm]	750
Minimum distance from non-flammable materials [mm]	50
Output	
Nominal heat efficiency [kW]	6.0
Minimum heat output [kW]	-
Maximum heat output [kW]	6.0
Minimum room heating capacity [m³]	65
Maximum room heating capacity [m³]	165
Energy efficiency class	A
Energy efficiency index (EEI)	103
Direct heat output [kW]	6.0
Indirect heat output [kW]	-
Efficiency at nominal heat output [%]	78
Efficiency at part load heat output [%]	-
Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	7.2
Flue gas temperature [°C]	299
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10

- not available

CLOU COMPACT COOK



AUSTROFLAMM

Equipment

Xtra heat storage technology	-
Heat Memory System	-
External air connection / operation independent of ambient air	-
Ash removal	Ash box

- not available