


ELISABETH



AUSTROFLAMM

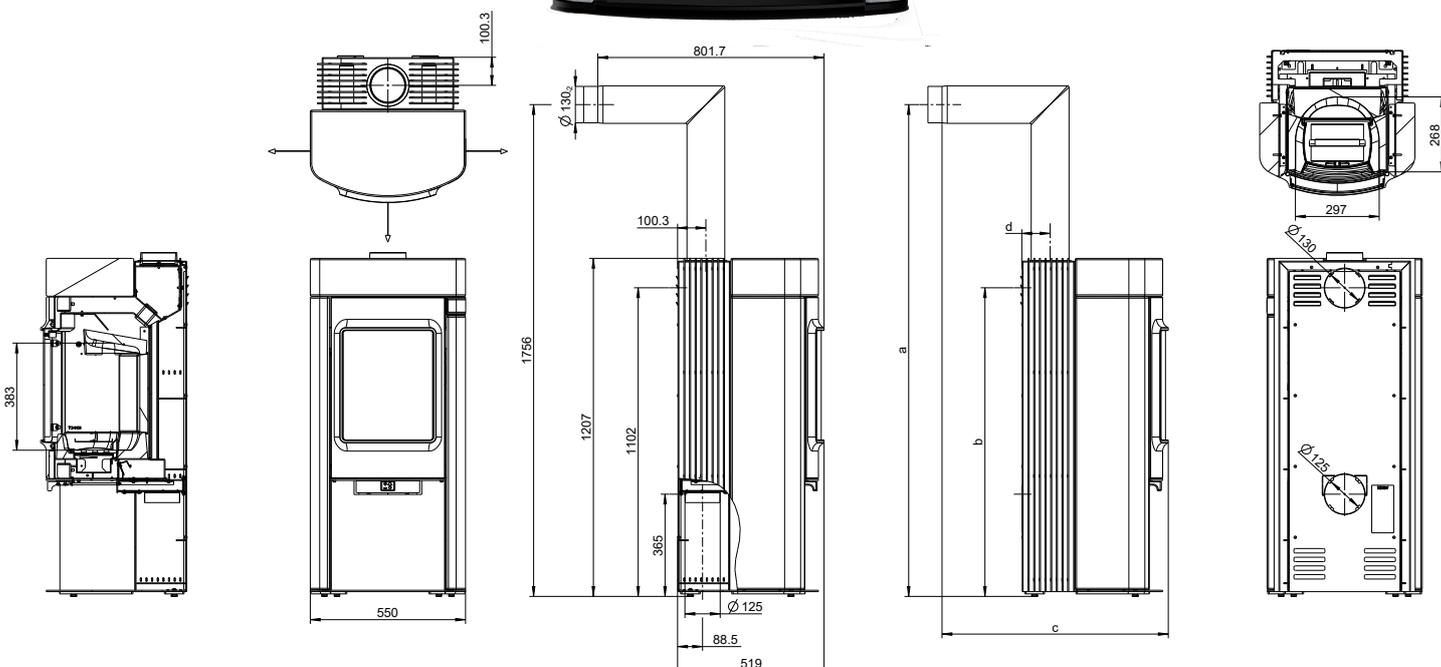

Dimensions and weight	
Height [mm]	1207
Width [mm]	550
Depth [mm]	519
Combustion chamber width [mm]	297
Combustion chamber height [mm]	383
Combustion chamber depth [mm]	268
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1756
Dimensions, b (with Austroflamm elbow piece) [mm]	1102
Dimensions, c (with Austroflamm elbow piece) [mm]	801.7
Dimensions, d (with Austroflamm elbow piece) [mm]	100.3
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	291
Weight Xtra [kg]	-
Weight, HMS [kg]	-
Total weight inc. steel case (STM) [kg]	-
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
Minimum distance to combustible materials - distance to rear dR [mm]	250/250
Minimum distance to combustible materials - left side dS_1 [mm]	250/250
Minimum distance to combustible materials - right side dS_2 [mm]	250/250
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1300/1300
Minimum distance to combustible materials - floor in front dF [mm]	600/600
Minimum distance to combustible materials - bottom dB [mm]	0/0
Minimum distance to combustible materials - left side radiation area dL_1 [mm]	600/600
Minimum distance to combustible materials - right side radiation area dL_2 [mm]	600/600
Minimum distance to combustible materials - distance to ceiling dC [mm]	750/750
Minimum distance from non-flammable materials [mm]	50/50
Output	
Nominal heat efficiency [kW]	7.0 / 7.2
Minimum heat output [kW]	-/-
Maximum heat output [kW]	7.0 / 7.2
Minimum room heating capacity [m³]	82/82
Maximum room heating capacity [m³]	210/210
Energy efficiency class	A+/A+
Energy efficiency index (EEI)	114 / 116
Direct heat output [kW]	7.0 / 7.2
Indirect heat output [kW]	-/-
Efficiency at nominal heat output [%]	86 / 86.9
Efficiency at at part load heat output [%]	-/-
Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	5.0 / 6.5
Flue gas temperature [°C]	299 / 200
Minimum delivery pressure at nominal heat output [Pa]	12/12
at 0.8 times nominal heat output [Pa]	10/10

- not available



Equipment

Xtra heat storage technology	-
Heat Memory System	-
External air connection / operation independent of ambient air	-
Ash removal	Ash box