


# KOKO XTRA 2.0



AUSTROFLAMM

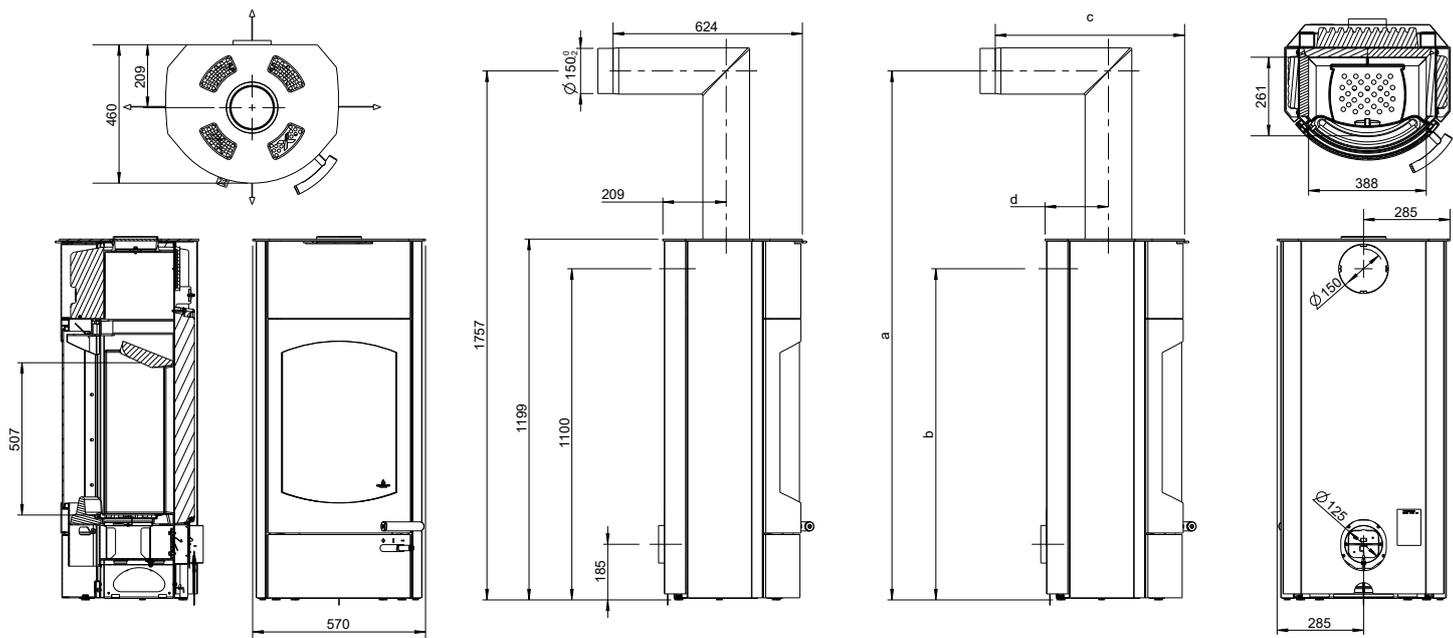

## Dimensions and weight

Height [mm]	1199
Width [mm]	570
Depth [mm]	460
Combustion chamber width [mm]	388
Combustion chamber height [mm]	507
Combustion chamber depth [mm]	261
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1757
Dimensions, b (with Austroflamm elbow piece) [mm]	1100
Dimensions, c (with Austroflamm elbow piece) [mm]	624
Dimensions, d (with Austroflamm elbow piece) [mm]	209
Flue pipe outlet, diameter [mm]	150
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	76
Weight Xtra [kg]	116
Weight, HMS [kg]	-
Total weight inc. steel case (STM) [kg]	202
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
Minimum distance to combustible materials - distance to rear dR [mm]	200/200
Minimum distance to combustible materials - left side dS_1 [mm]	350/350
Minimum distance to combustible materials - right side dS_2 [mm]	350/350
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1300/1300
Minimum distance to combustible materials - floor in front dF [mm]	0/0
Minimum distance to combustible materials - bottom dB [mm]	0/0
Minimum distance to combustible materials - left side radiation area dL_1 [mm]	600/600
Minimum distance to combustible materials - right side radiation area dL_2 [mm]	600/600
Minimum distance from non-flammable materials [mm]	50/50

## Equipment

Xtra heat storage technology	standard
Heat Memory System	-
External air connection / operation independent of ambient air	Yes
Ash removal	Ash box

## Data for the chimney sweep

Flue gas mass flow at nominal heat output [g/s]	6.3/6.5
Flue gas temperature [°C]	310/223
Minimum delivery pressure at nominal heat output [Pa]	13/12
at 0.8 times nominal heat output [Pa]	10/10

Output	
Nominal heat efficiency [kW]	7.5/8.2
Minimum heat output [kW]	-
Maximum heat output [kW]	7.5/8.2
Minimum room heating capacity [m <sup>3</sup> ]	82/98
Maximum room heating capacity [m <sup>3</sup> ]	210/255
Energy efficiency class	A+/A+
Energy efficiency index (EEI)	109/ 118
Direct heat output [kW]	7.5/8.2
Indirect heat output [kW]	-
Efficiency at nominal heat output [%]	82/88.1
Efficiency at at part load heat output [%]	-