


LUX



AUSTROFLAMM

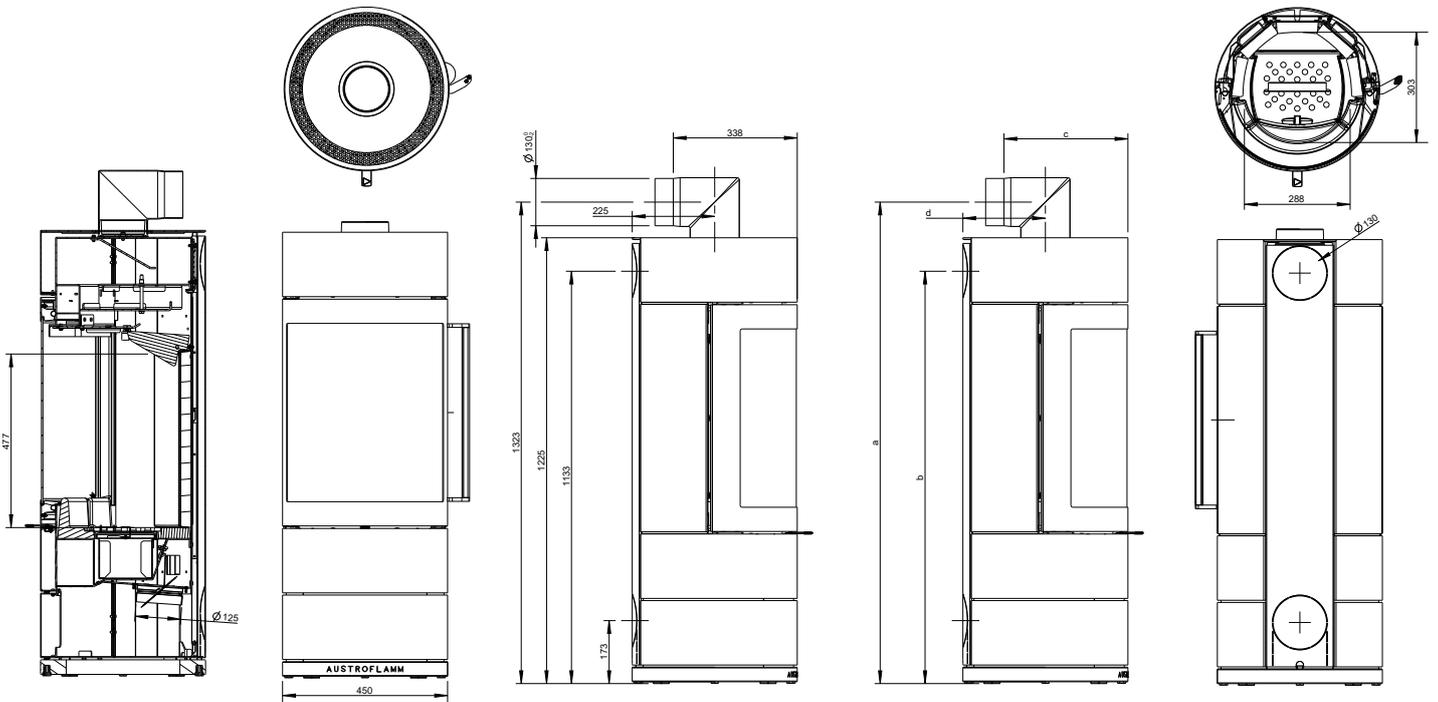

www.austroflamm.com

Dimensions and weight

Height [mm]	1225
Width [mm]	450
Depth [mm]	450
Combustion chamber width [mm]	288
Combustion chamber height [mm]	477
Combustion chamber depth [mm]	303
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1323
Dimensions, b (with Austroflamm elbow piece) [mm]	1133
Dimensions, c (with Austroflamm elbow piece) [mm]	338
Dimensions, d (with Austroflamm elbow piece) [mm]	225
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	138
Weight Xtra [kg]	-
Weight, HMS [kg]	46
Total weight inc. steel case (STM) [kg]	138
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
Minimum distance to combustible materials - distance to rear dR [mm]	100
Minimum distance to combustible materials - left side dS_1 [mm]	590
Minimum distance to combustible materials - right side dS_2 [mm]	590
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1000
Minimum distance to combustible materials - floor in front dF [mm]	0
Minimum distance to combustible materials - bottom dB [mm]	0
Minimum distance to combustible materials - left side radiation area dL_1 [mm]	0
Minimum distance to combustible materials - right side radiation area dL_2 [mm]	0
Minimum distance to combustible materials - distance to ceiling dC [mm]	750
Minimum distance from non-flammable materials [mm]	50

Output

Nominal heat efficiency [kW]	7.0
Minimum heat output [kW]	-
Maximum heat output [kW]	7.0
Minimum room heating capacity [m³]	82
Maximum room heating capacity [m³]	210
Energy efficiency class	A+
Energy efficiency index (EEI)	108
Direct heat output [kW]	7.0
Indirect heat output [kW]	-
Efficiency at nominal heat output [%]	82.0
Efficiency at part load heat output [%]	-

Equipment

Xtra heat storage technology	-
Heat Memory System	Accessories
External air connection / operation independent of ambient air	Yes
Ash removal	Ash box

- not available

Data for the chimney sweep

Flue gas mass flow at nominal heat output [g/s]	6.1
Flue gas temperature [°C]	273
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10